

# 2 Kg ABC Powder Stored Pressure

## Extinguisher




### Technical Specification

Extinguisher Code	A2S/2008
Extinguishant	ABC Powder. Mono-Ammonium Phosphate and Ammonium Sulphate
Propellant Type	Stored Pressure
Capacity	2 kg
Paint Primer/Finish	Enamel
Paint Colour	Signal Red (RAL 3000)
Fire Class	A, B, C Types + Electrical
Fire Rating	13A/89B
Operating Temperature	-30 to +60°C
Test Pressure	26 Bar
Minimum Discharge Time	12 sec
Discharge Range	5 m
Safe Operating Distance	2 m
Cylinder	Aluminium Alloy
Operating Valve	Brass
Height	370 mm
Diameter	110 mm
Full Weight	3.3 kg
Approval	EN 3/MED

### Spare Parts

Item	Description	Part No
1	Valve, complete	21806
2	Safety Pin	21053
3	Safety Valve	21083
4	Powder ABC40	31140
5	Check Valve	21025
6	Spring	21807/S
7	Spindle	21026
8	O Ring Valve	21044
9	Siphon Nut	21095
10	Siphon Tube	21734
11	Pressure Gauge	21511
12	Nozzle	21097
13	Safety Seal	28019
14	Cylinder	27205
15	Extinguisher Bracket	21026

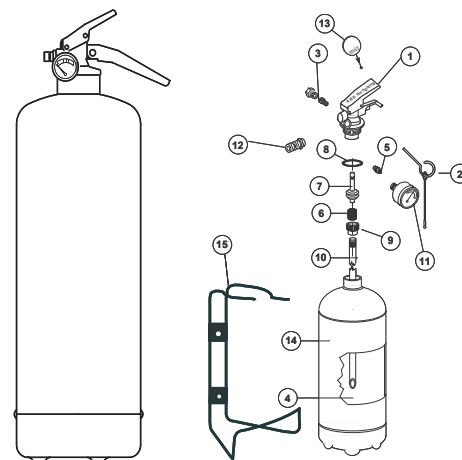

### INTERNATIONAL SALES

Angus Fire Ltd  
Angus House, Haddenham Business Park,  
Pegasus Way, Haddenham, Aylesbury, HP17 8LB, UK  
Tel: +44 (0)1844 293600 • Fax: +44 (0)1844 293664

### UK SALES

Angus Fire Ltd  
Station Road, Bentham, Lancaster, LA2 7NA, UK  
Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.