

# 2 Kg Carbon Dioxide Steel Stored Pressure Extinguisher




## Technical Specification

Extinguisher Code	CS2SH
Extinguishant	Carbon Dioxide CO <sub>2</sub>
Propellant Type	Stored Pressure
Capacity	2 kg
Paint Primer/Finish	Polyester Powder Paint
Paint Colour	Signal Red (RAL 3000)
Colour Coding to BS7863	Black (RAL 9005)
Fire Class	B + Electrical
Fire Rating	34B
Operating Temperature	-20 to +60°C
Test Pressure	250 Bar
Operating Pressure at 20°C	50 Bar
Discharge Duration	10 sec
Discharge Range	3 m
Safe Operating Distance	2 m
Cylinder	Chromium Molybdenum Alloy Steel
Operating Valve	Brass Hot Stamping
Discharge Nozzle	Swivel Horn
Height	580 mm
Diameter	102 mm
Full Weight	6.5 kg
Empty Weight (excluding cartridge)	4.5 kg
Nominal Carton Size	183 x 155 x 625 mm
Approval	BS EN 3/BAFE

## Spare Parts

Item	Description	Part No
A	Swivel Horn and Elbow	MBC 010
B	Brass Tapered Valve	MVLV 0010
-	Pull Tight Seal (not shown)	XE 18798
-	Wall Bracket (not shown)	MBRH 0540

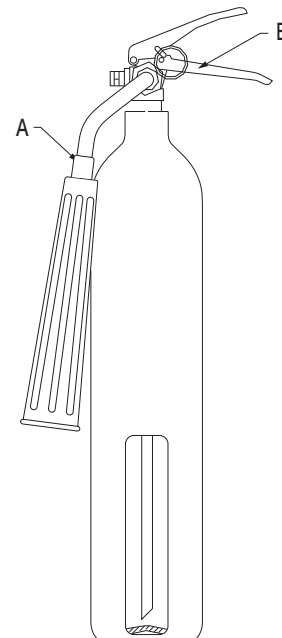

## INTERNATIONAL SALES

**Angus Fire Ltd**  
Angus House, Haddenham Business Park,  
Pegasus Way, Haddenham, Aylesbury, HP17 8LB, UK  
Tel: +44 (0)1844 293600 • Fax: +44 (0)1844 293664

## UK SALES

**Angus Fire Ltd**  
Station Road, Bentham, Lancaster, LA2 7NA, UK  
Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.

© Angus Fire  
5317/3 02.14