




**ANGUS  
FIRE**

# Tartan Landing Valves

**Horizontal type** MT-450716

**Bib-nosed type** MT-451216

**Manufactured and approved to BS5041-1 1987**

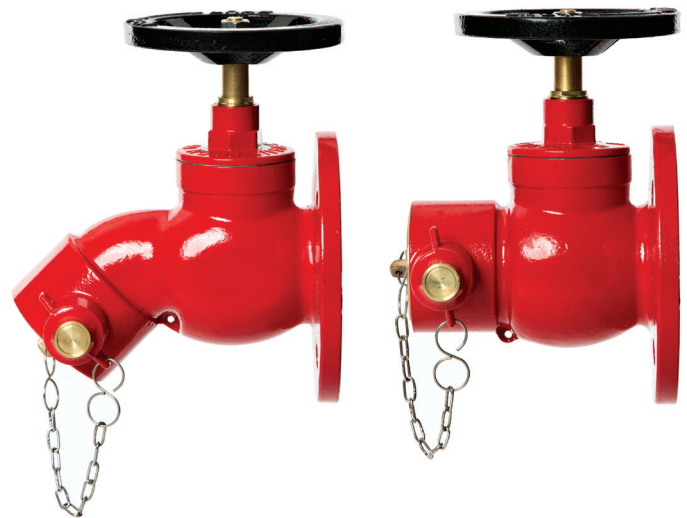


## Common features


- Construction and performance in accordance with BS5041 part 1 1987
- Material - Main body and outlet connection LG2 BS1400 Gunmetal
- Inlet connection 65 mm (2.5") NP16 BS4504 flat face flange
- Outlet connection 65 mm (2.5") Female Instantaneous to BS336
- Working Pressure 15 bar, Test Pressure 22.5 bar
- Supplied with Male BS336 Blank Plug & Chain
- Handwheel in Grey Cast iron, black painted finish
- Flow Rate @ 7 Bar approximately 8.5 litres per second
- 4.5 Turns to fully open
- Finish - Red RAL3000



	Horizontal	Bib-nose
Part No	MT-450716	MT- 451216
Dimensions (mm) W x H	180 x 280	225 x 250
Weight (kg)	7.35	7.50



Horizontal Type



Bib-nosed Type



Licence No. KM 647384

## INTERNATIONAL SALES

### Angus Fire Ltd

Angus House, Haddenham Business Park,  
Pegasus Way, Haddenham, Aylesbury, HP17 8LB, UK  
Tel: +44 (0)1844 293600 • Fax: +44 (0)1844 293664

## UK SALES

### Angus Fire Ltd

Station Road, Bentham, Lancaster, LA2 7NA, UK  
Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.

© Angus Fire  
6847/1 02/17