

# 6 Kg ABC Powder Gas Cartridge Extinguisher




## Technical Specification

Extinguisher Code	A6G
Extinguishant	ABC Powder. Mono-Ammonium Phosphate and Ammonium Sulphate
Propellant Type	115 gm Gas Cartridge
Capacity	6 kg
Paint Primer/Finish	Polyester Powder Paint
Paint Colour	Signal Red (RAL 3000)
Colour Coding to BS7863	French Blue (RAL 5002)
Fire Class	A, B, C Types + Electrical
Fire Rating	27A/183B
Operating Temperature	-20 to +60°C
Test Pressure	26 Bar
Operating Pressure at 20°C	12 Bar
Discharge Duration	20 sec
Discharge Range	5 m
Cylinder	Mild Steel 1.6mm to EN 10111-DD12
Operating Valve	Diecast Zinc Alloy to EN 1774-Zn A14 (ZL3)
Height	525 mm
Diameter	165 mm
Full Weight	11.3 kg
Nominal Carton Size	170 x 170 x 540 mm
Approval	BS EN 3

## Spare Parts

Item	Description	Part No
1	Headcap assembly c/w hose and pick-up tube	MBRH 1090
2	Headcap 'O' ring seal	MBRH 0230
3	Safety pin	MBRH 0180
4	Safety pin cap	MBRH 0165
5	Break Tie Indicator	XE 18798
6	Service indicator	MBRH 0185
7	C115 cartridge	MC115
-	Wall bracket (not shown)	MBRH 0195
-	Transport bracket and strap (not shown)	MBRH 0311
-	Powder refill	XP 16161

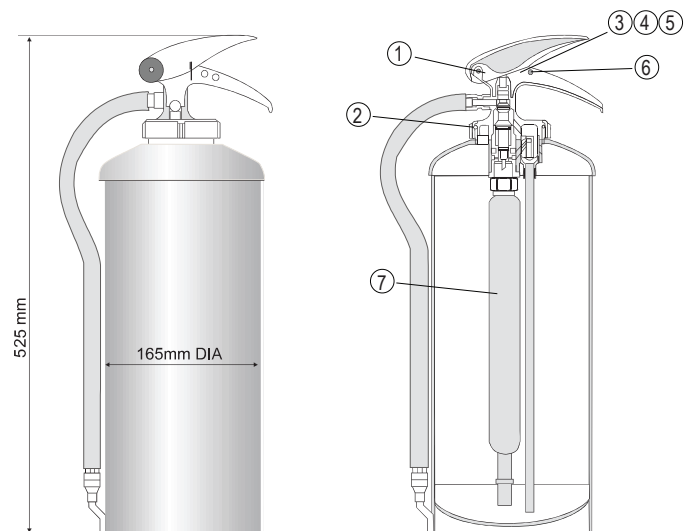

Licence No. KM611605

**UK SALES**  
**Angus Fire Ltd**  
 Station Road, Bentham, Lancaster, LA2 7NA, UK  
 Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.