

# 6 Kg BC Powder Gas Cartridge Extinguisher




## Technical Specification

Extinguisher Code	B6G
Extinguishant	Standard BC Powder Sodium Bicarbonate
Propellant Type	115 gm Gas Cartridge
Capacity	6 kg
Paint Primer/Finish	Polyester Powder Paint
Paint Colour	Signal Red (RAL 3000)
Colour Coding to BS7863	French Blue (RAL 5002)
Fire Class	B, C Types + Electrical
Fire Rating	183B
Operating Temperature	-20 to +60°C
Test Pressure	23 Bar
Operating Pressure at 20°C	12.5 Bar
Discharge Duration	18 sec
Discharge Range	5 m
Cylinder	Mild Steel 1.6mm to EN 10111-DD12
Operating Valve	Diecast Zinc Alloy to EN 1774-Zn A14 (ZL3)
Height	512 mm
Diameter	165 mm
Full Weight	11.7 kg
Empty Weight	4.6 kg
Nominal Carton Size	170 x 170 x 540 mm
Approval	BS EN 3/BAFE

## Spare Parts

Item	Description	Part No
1	Headcap assembly c/w hose and pick-up tube	MBRH 1090
2	Headcap 'O' ring seal	MBRH 0230
3	Safety pin	MBRH 0180
4	Safety pin cap	MBRH 0165
5	Break Tie Indicator	XE 18798
6	Service indicator	MBRH 0185
7	115g cartridge	MC115
-	Wall bracket (not shown)	MBRH 0195
-	Transport bracket and strap (not shown)	MBRH 0311

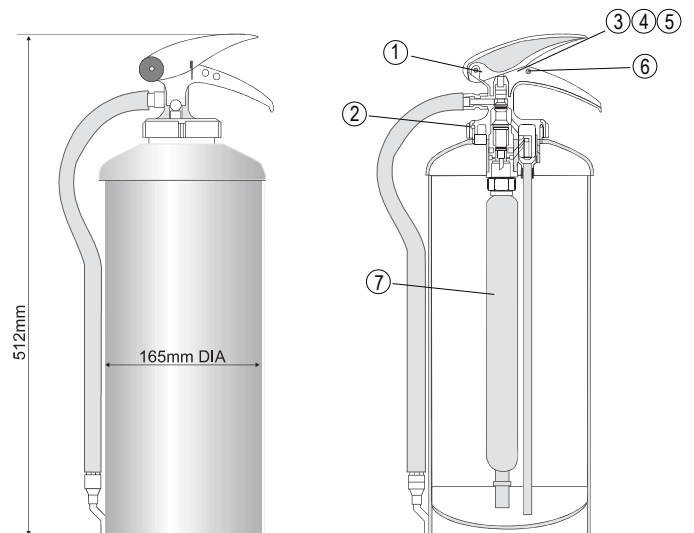

**INTERNATIONAL SALES**  
**Angus Fire Ltd**  
 Angus House, Haddenham Business Park,  
 Pegasus Way, Haddenham, Aylesbury, HP17 8LB, UK  
 Tel: +44 (0)1844 293600 • Fax: +44 (0)1844 293664

**UK SALES**  
**Angus Fire Ltd**  
 Station Road, Bentham, Lancaster, LA2 7NA, UK  
 Tel: +44 (0)1524 264000 • Fax: +44 (0)1524 264180

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.

© Angus Fire  
 5311/4 09.15